



- Small Foot Print, Surface Mount
- RoHS Compliant
-

Electrical Specifications at +20°C unless noted otherwise		
Parameters	Value	Notes
Inductance (mH)	1.06 ± 10%	(1-2) @ 100 KHz, 0.1V
Leakage Inductance (µH)	22 Max	(1-2), short (4+5+6+7+9+10), @ 100 KHz, 0.1V
DCR (mΩ)	1000 Max	(1-2)
DCR (mΩ)	300 Max	(5-4)
DCR (mΩ)	20 Max	(10,9-6,7)
HIPOT (VAC)	3000	(1+2+4+5) - (6+7+9+10) @ 60 Hz for 1s

Schematics

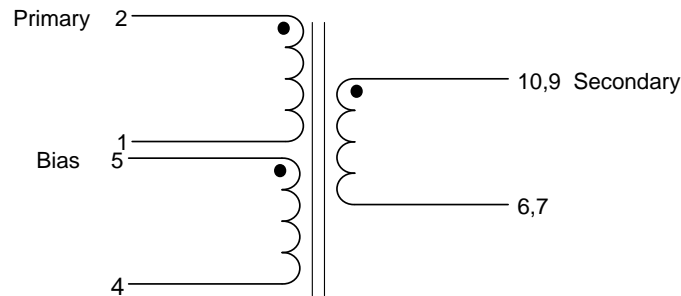

Mechanicals

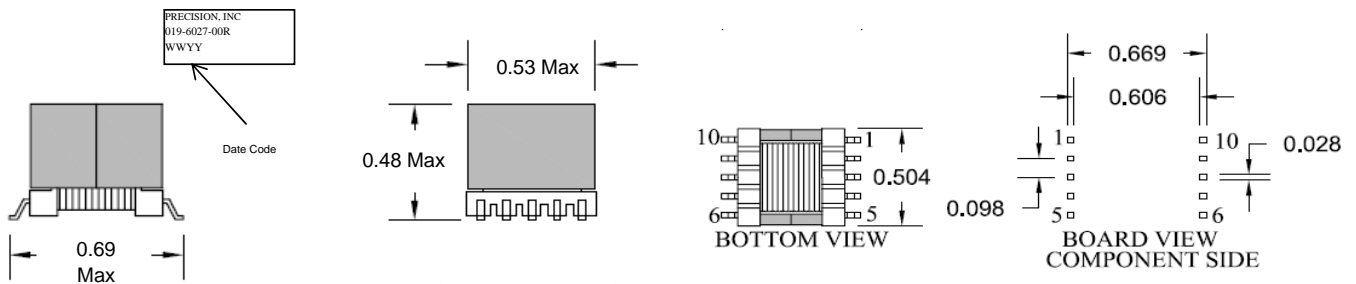

Specifications subject to change without notice.
Dimensions are in inches, metric in [].
Pin 1 indicated by dot on label or part.
Label shown is only for illustrative purposes only.

