






- Small foot print, SMT
- RoHS compliant
- Tape & Reel is available as 019-6027-01RT

Electrical Specifications at +20°C unless noted otherwise		
Parameters	Value	Notes
Inductance (mH)	0.880-1.07	2-1 @ 0.1V, 100kHz,
Leakage Inductance (µH)	30 Max.	2-1 tie 4+5+6+7+9+10 @ 0.1VV, 100kHz
DC Resistance (Ω)	1.2 Max.	2-1
DC Resistance (Ω)	.325 Max.	5-4
DC Resistance (Ω)	0.009 Max.	10,9-6,7
Dielectric (VDC)	500	(1+2+4+5)-6 @ 1mA, 60Hz, 1s

**Schematics**

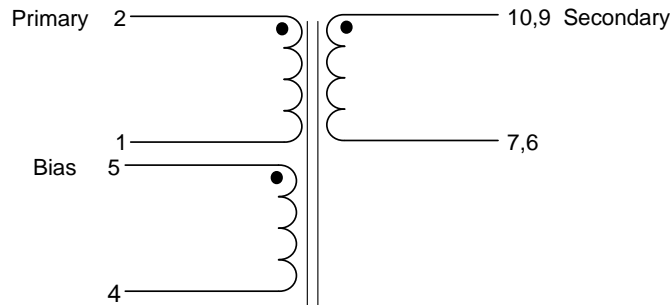

**Mechanicals**

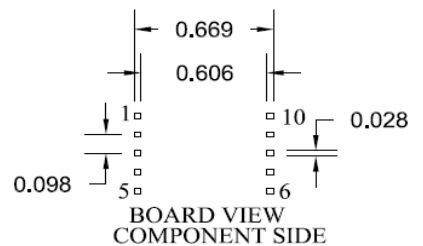

Specifications subject to change without notice.  
Dimensions are in inches, metric in [ ].  
Label shown is only for illustrative purposes only.

