


- Designed for Power Intergrations RD159
- RoHS Compliant


Electrical Specifications at +20°C unless noted otherwise

Parameters	Value	Notes
Inductance (mH)	2.28 ± 10%	(2-5) @ 100 KHz, 0.4V
Leakage Inductance (µH)	65 Max.	(2-5), short (FL1+FL2) @ 100 KHz, 0.4V
DCR (Ω)	3.9 Max	(2-5)
DCR (mΩ)	50 Max	(1-3)
DCR (mΩ)	45 Max	(FL1-FL2)
HIPOT (VAC)	3000	(1-5) - (6-10) @ 60 Hz for 60s

Schematics

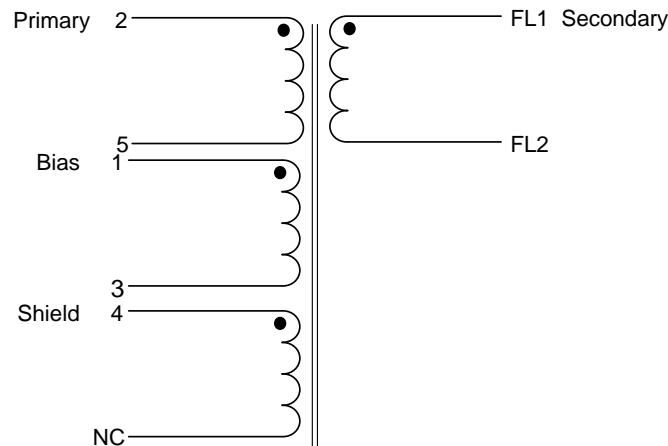

Mechanicals

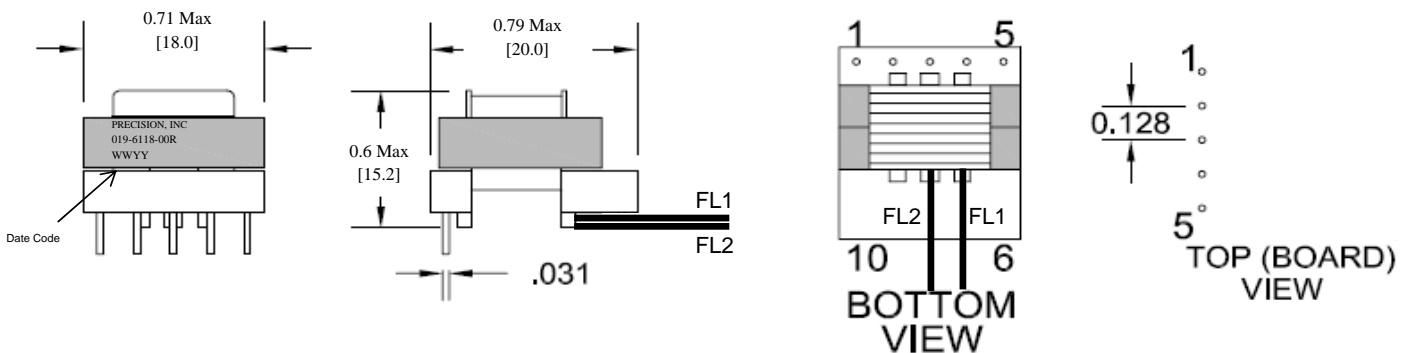

Specifications subject to change without notice.
 Dimensions are in inches, metric in [].
 Pin 1 indicated by dot on label or part.
 Label shown is only for illustrative purposes only.

