



- Designed for Power Intergrations RD157
- RoHS Compliant

Electrical Specifications at +20°C unless noted otherwise		
Parameters	Value	Notes
Inductance (mH)	2.58 ± 10%	(3-5) @ 100 KHz, 0.4V
Leakage Inductance (µH)	130 Max.	(3-5), short (8+10) @ 100 KHz, 0.4V
DCR (Ω)	6 Max	(3-5)
DCR (mΩ)	20 Max	(10-8)
DCR (mΩ)	21 Max	(1-2)
DCR (mΩ)	30 Max	(2-4)
HIPOT (VAC)	3000	(1-5) - (6-10) @ 60 Hz for 60s

**Schematics**

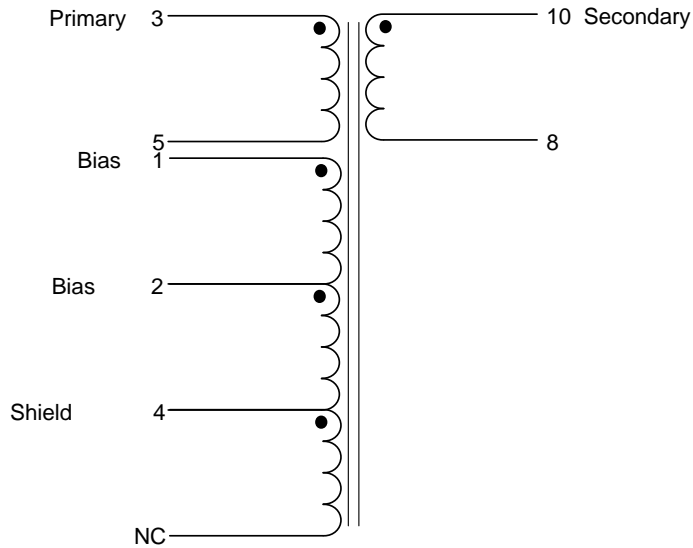

**Mechanicals**

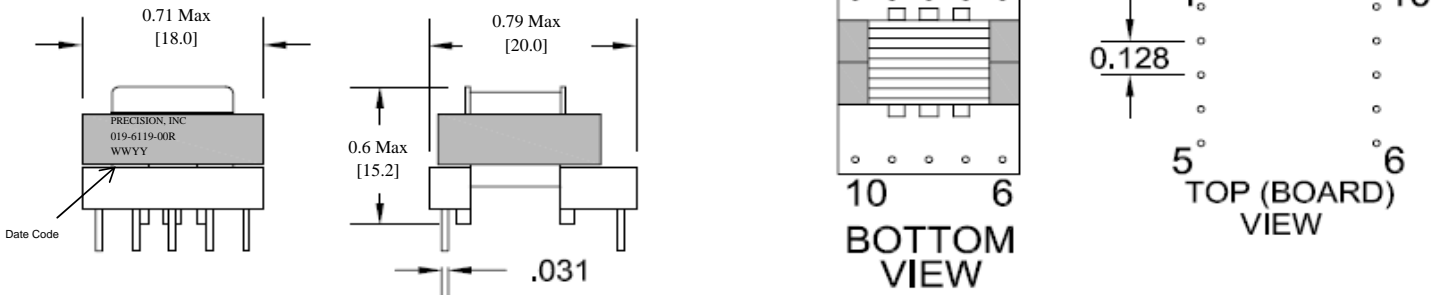

Specifications subject to change without notice.  
 Dimensions are in inches, metric in [ ].  
 Pin 1 indicated by dot on label or part.  
 Label shown is only for illustrative purposes only.

