



- For EP-85, 6V, 330mA Low Cost Charger (Power Integration LNK564 Chipset)
- Input Voltage: 90-265VAC
- RoHS Compliant



**Electrical Specifications at +20°C unless noted otherwise**

Parameters	Value	Notes
Inductance (mH)	2.7 ± 10%	(1-2) @ 100 KHz, 0.1V
Leakage Inductance (µH)	75 Max	(1-2), short (4+5+6+7)) @ 100KHz, 0.1V
DCR (Ω)	4 Max	(1-2)
DCR (mΩ)	410 Max	(4-5)
DCR (mΩ)	35 Max	(7-6)
HIPOT (VAC)	3000	(1-4) @ 60 Hz for 60s

**Schematics**

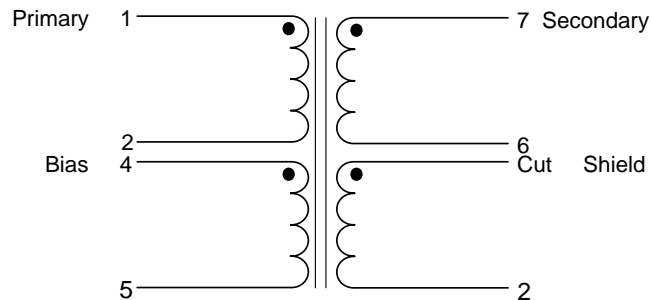

**BOTTOM VIEW**

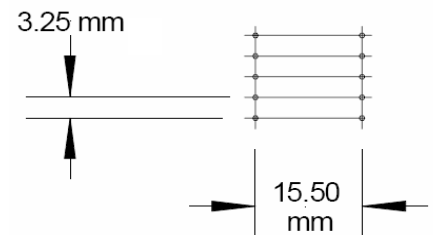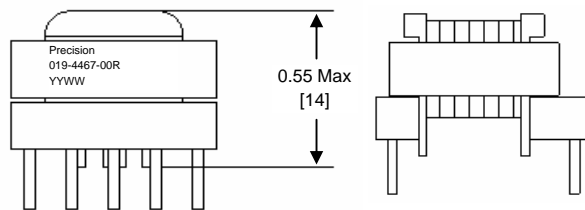

Specifications subject to change without notice.  
Dimensions are in inches, metric in [ ].  
Pin 1 indicated by dot on label or part.  
Label shown is only for illustrative purposes only.

