


- Designed for IR1167 100W QR Demo Board
- Input Voltage: 100 - 240VAC
- Power Rating: 100W continuous


**Electrical Specifications at +20°C unless noted otherwise**

Parameters	Value	Notes
Inductance (μH)	250 ± 15%	(4-6) @ 0.1V, 10 KHz
Leakage Inductance (μH)	10 Max	(4-6), short (7+8+9+10+11+12) @ 0.1V 100 KHz
DCR (mΩ)	40 Max	(4-6)
DCR (mΩ)	150 Max	(2-1)
DCR (mΩ)	10 Max	(7+8+9) - (10+11+12)
HIPOT (VAC)	3000	PRI - SEC, 60 Hz, 2mA

**Schematics**

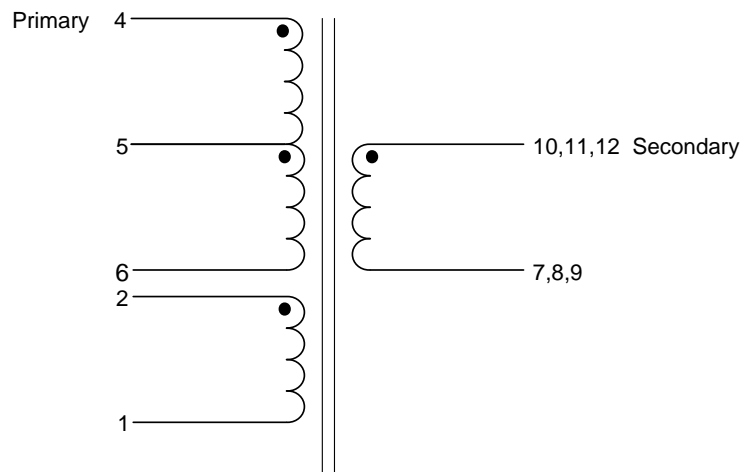

**Mechanicals**

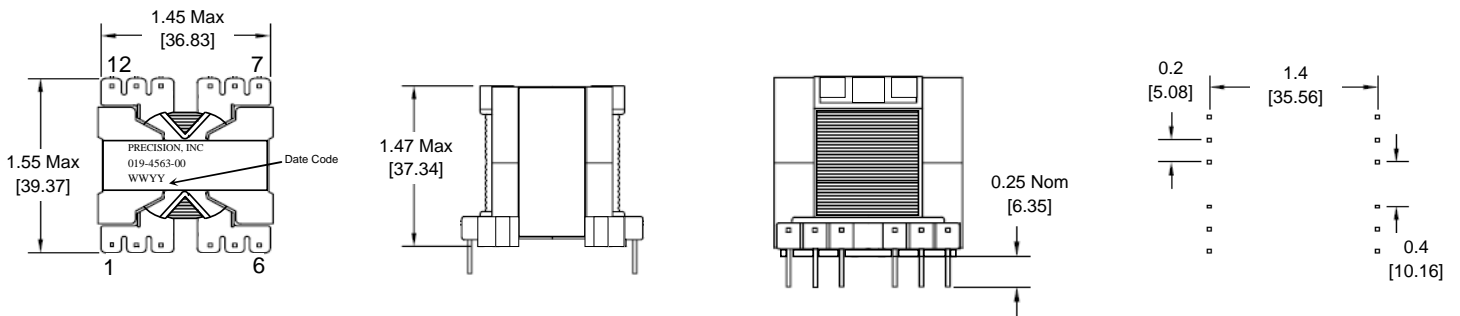

Specifications subject to change without notice.  
 Dimensions are in inches, metric in [ ].  
 Pin 1 indicated by dot on label or part.  
 Label shown is only for illustrative purposes only.