


- Designed for Power Intergrations RD158
- RoHS Compliant





Electrical Specifications at +20°C unless noted otherwise

Parameters	Value	Notes
Inductance (mH)	1.074 ± 10%	(4-1) @ 100 KHz, 0.4V
Leakage Inductance (µH)	95 Max.	(4-1), short (10+8) @ 100 KHz, 0.4V
DCR (Ω)	3.6 Max	(4-1)
DCR (mΩ)	20 Max	(5-3)
DCR (mΩ)	20 Max	(3-2)
DCR (mΩ)	20 Max	(10-8)
HIPOT (VAC)	3000	(1-5) - (6-10) @ 60 Hz for 60s

Schematics

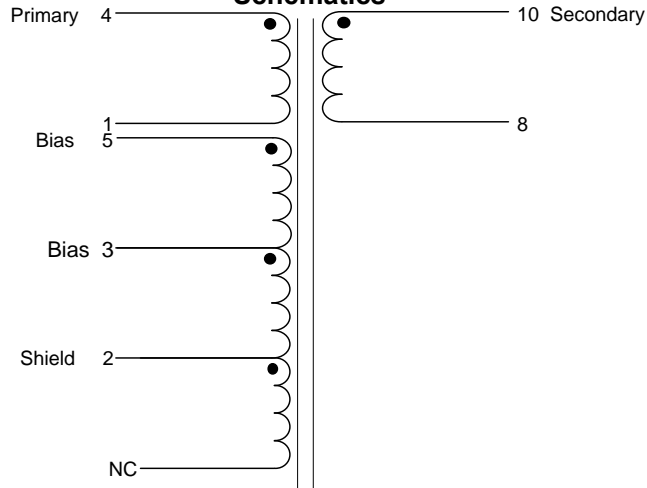

Mechanicals

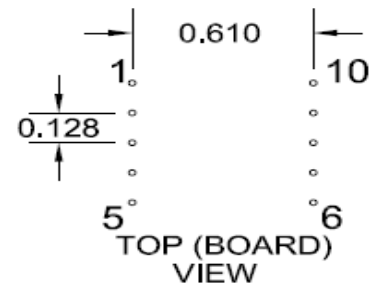

Specifications subject to change without notice.
Dimensions are in inches, metric in [].
Pin 1 indicated by dot on label or part.
Label shown is only for illustrative purposes only.

