
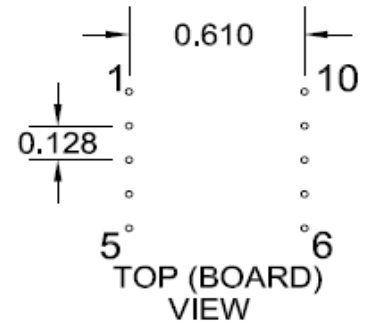





- Designed for RDK-201
- RoHS Compliant
- 

**Electrical Specifications at +20°C unless noted otherwise**

Parameters	Value	Notes
Inductance (mH)	1.67 ± 10%	(2-1) @ 100 KHz, 0.1V
Leakage Inductance (µH)	100 Max	(2-1), short (3+5+6+9), 100 kHz, 0.1V
DCR (Ω)	3.2 Max	(2-1)
DCR (mΩ)	295 Max	(5-3)
DCR (mΩ)	75 Max	(9-6)
HIPOT (VAC)	3000	(1-6) @ 60 Hz for 1s

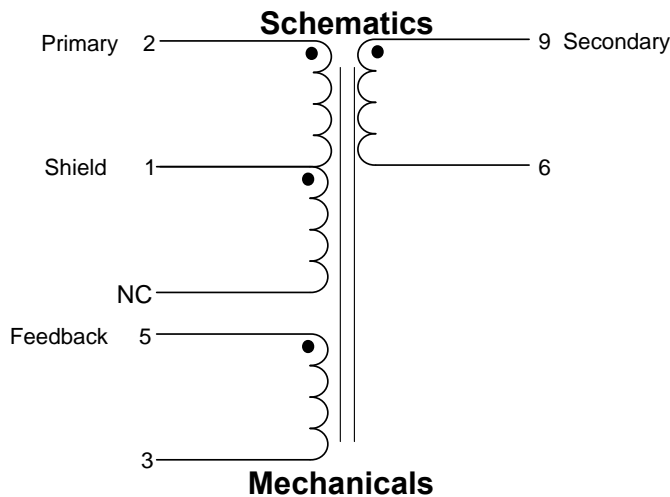

Specifications subject to change without notice.  
Dimensions are in inches, metric in [ ].  
Pin 1 indicated by dot on label or part.  
Label shown is only for illustrative purposes only.

